


	Test report	755-QL21-R02 ver. 1	
	Applicant	LARES di Claudio Lerici Regione Viazzi, 6 15010 - Castelletto d'Erro (AL) - Italy	
	Type	SC_04 (IEN 7121)	



TEST REPORT 755-QL21-R02 ver. 1

This revision of the test report cancels and replaces the previous version



Addresses Indirizzi		
Applicant Richiedente	LARES di Claudio Lerici - Regione Viazzi, 6 - 15010 - Castelletto d'Erro (AL) - Italy	
Manufacturer Produttore	Same as applicant/Come il richiedente	
Dates and authorization Date e autorizzazioni		
Report Date Data emissione rapporto di prova	Ver. 0 18/05/2021 Ver. 1 10/06/2021 correction of measuring distance	
Written by Preparato da	Ing. Nicola Parolini	
Authorized by Autorizzato da	Ing. Michele Peschiera	
Sample under test (data declared by the applicant and under applicant's responsibility) Dispositivo sottoposto a prova (dati forniti dal richiedente e sotto la sua responsabilità)		
Sample description Descrizione dispositivo	Spot light source	
Type Modello	SC_04 IEN 7121	
Light source: Sorgente luminosa:	Not declared	
Multimeter: Multimetro :	Keysight U1253B sn MY61060043	
Illuminant A current Corrente per illuminante A	I _A : 4,171 A	
Applicable Standard Norme applicabili		
CIE 15:2018 Colorimetry and CIE 70:1987 Measurement of absolute luminous intensity distribution		

The test results and observations indicated in this test report refer exclusively to the samples as received and tested. It is not permitted to transfer the results to other systems or configurations. The publication or duplication of this test report with enclosures, or Part of this test report or enclosures, without a written consent of the test laboratory is not permitted. The test laboratory not assumes any liability to any party for any loss, expense or damage occasioned by the use of this report. Any use of the laboratories name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by the test laboratory. In case of a multilingual test report, the English version is the only official version.



I risultati e le osservazioni indicate in questo rapporto di prova sono riferiti esclusivamente ai campioni così come ricevuti e testati. Non è permesso utilizzare i risultati e le osservazioni di questo rapporto di prova per altri sistemi o configurazioni. Non è permessa la pubblicazione o la duplicazione completa o parziale di questo rapporto di prova e dei suoi allegati senza un consenso scritto da parte del laboratorio di prova. Il laboratorio di prova non si assume responsabilità nei confronti di terzi per danni o eventuali costi derivanti dall'utilizzo dei dati presenti in questo rapporto di prova. Ogni uso del nome del laboratorio di prova e dei suoi marchi per la vendita o per pubblicizzare il prodotto testato deve essere prima approvato in forma scritta dal laboratorio di prova. In caso di rapporti di prova con più lingue, la versione inglese è da considerarsi quella ufficiale.

	Test report	755-QL21-R02 ver. 1	 LAB N° 1235 L Membro degli Accordi di Mutuo Riconoscimento EA, IAF e ILAC Signatory of EA, IAF and ILAC Mutual Recognition Agreements
	Applicant	LARES di Claudio Lerici Regione Viazzi, 6 15010 - Castelletto d'Erro (AL) - Italy	
	Type	SC_04 (IEN 7121)	



Annex Annesso	Test Name Identificazione prova	Test Procedure Procedura di prova	Test Requirement Requisito di prova	Verdict / Result Esito / Risultato
I	Maximum light intensity at 10 m with 4,000 A setting	The sample was mounted (with the support provided by the manufacturer) on the goniometer and powered with the constant current of 4,000 A measured with the multimeter provided by the applicant. The light intensity distribution at 10 m was measured and the maximum light intensity was determined	Not applicable	$I_{\max}[\text{cd}] = 76,1 \text{ cd}$ $0,00^\circ \text{ H}; -1,00^\circ \text{ V}$
II	CCT measurement with I_A setting	The sample was mounted on the goniometer; correlated color temperature was measured in the optical axis at the current I_A declared and measured with the multimeter provided by the applicant	Not applicable	$CCT = 2857 \text{ K}$
III	Maximum light intensity at 10 m with I_A setting	The sample was mounted (with the support provided by the manufacturer) on the goniometer and powered with the constant current I_A measured with the multimeter provided by the applicant. The light intensity distribution at 10 m was measured and the maximum light intensity was determined	Not applicable	$I_{\max_A}[\text{cd}] = 96,7 \text{ cd}$ $-1,00^\circ \text{ H}; 0,00^\circ \text{ V}$
IV	Photographs	-	-	-


	Test report	755-QL21-R02 ver. 1	 <small>LAB N° 1235 L</small> <small>Membro degli Accordi di Mutuo Riconoscimento EA, IAF e ILAC</small> <small>Signatory of EA, IAF and ILAC Mutual Recognition Agreements</small>
	Applicant	LARES di Claudio Lerici Regione Viazzi, 6 15010 - Castelletto d'Erro (AL) - Italy	
	Type	SC_04 (IEN 7121)	



Uncertainty Incertezza	
Photometric parameter Parametri fotometrici	Luminous intensity and illuminance/ Intensità luminosa e illuminamento = 1,9 %
Color coordinates Coordinate cromatiche	$x = 0,0007$ $y = 0,0009$
Correlated colour temperature Temperatura colore	± 21 K
Sample mounting precision Precisione montaggio dispositivo	$\pm 0,5^\circ$
Statement Dichiarazione	<p>The measured value (y) and the associated expanded uncertainty (U) represent the interval ($y \pm U$) which contains the value of the measured quantity with a probability of approximately 95 % and a coverage factor $k = 2$.</p> <p>The values into the different annex have the maximum significant figures managed by the measurement software.</p> <p>Il valore misurato (y) e l'incertezza estesa associata (U) rappresentano l'intervallo ($y \pm U$) che contiene il valore della grandezza misurata con una probabilità di circa il 95 % e un fattore di copertura $k = 2$.</p> <p>I valori negli annessi sono riportati con il massimo numero di cifre significative gestite dal software della strumentazione.</p>

	Test report	755-QL21-R02 ver. 1	
	Applicant	LARES di Claudio Lerici Regione Viazzi, 6 15010 - Castelletto d'Erro (AL) - Italy	
	Type	SC_04 (IEN 7121)	

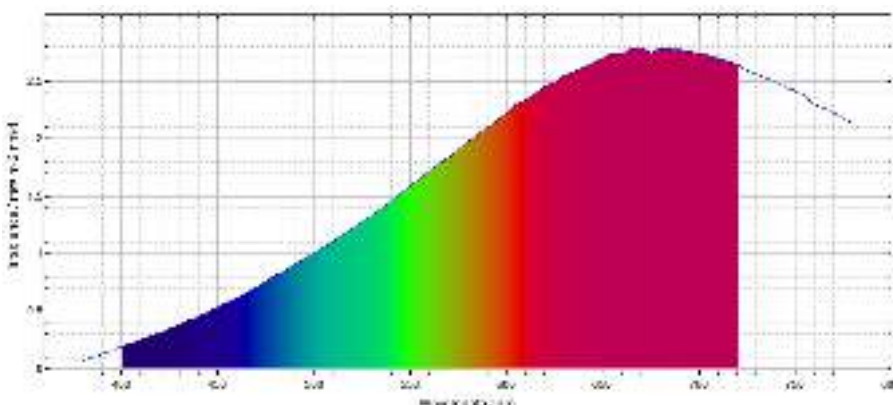

ANNEX I		Maximum light intensity at 10 m with 4,000 A setting																																																																																																																																																																											
Standards and applicable points		CIE 70:1987																																																																																																																																																																											
Sample identification		SC_04 (IEN 7121)																																																																																																																																																																											
Place of testing		Qualilab Srl - Via Trento, 87 - 25020 - Capriano del Colle (BS) - Italy																																																																																																																																																																											
Test date		17/05/2021																																																																																																																																																																											
Environmental conditions		Temperature 23 °C ± 3 °C																																																																																																																																																																											
Instruments		Temperature-humidity datalogger Testo 174H QL-IN-018 Temperature-humidity datalogger Testo 174H QL-IN-020 Photogoniometer LMT GO-H 1200 QL-IN-002																																																																																																																																																																											
Test procedure		The sample was mounted (with the support provided by the manufacturer) on the goniometer and powered with the constant current of 4,000 A measured with the multimeter provided by the applicant. The light intensity distribution at 10 m was measured and the maximum light intensity was determined. The sample was set into the pivot point of the goniometer and the optical axis was installed perpendicular to the photometer head.																																																																																																																																																																											
Test requirements		Not applicable																																																																																																																																																																											
VERDICT / RESULT		<table><tr><td>Program:</td><td></td><td colspan="8">max I scan 25-25 15-15</td></tr><tr><td colspan="12">max I scan</td></tr><tr><td>Name:</td><td colspan="11">LARES 755-QL21 SC.04 (IEN 7121) max cd 2021 at 4.00 A</td></tr><tr><td>Number:</td><td colspan="11">constant A 4.00 A</td></tr><tr><td>Report:</td><td colspan="11"></td></tr><tr><td>Test no.:</td><td colspan="11"></td></tr><tr><td>Lamp type:</td><td colspan="11"></td></tr><tr><td>Lamp no:</td><td colspan="11">SC.04</td></tr><tr><td>Lamp flux:</td><td colspan="5">0 lm</td><td>Operator:</td><td colspan="5">Qualilab</td></tr><tr><td>Voltage:</td><td colspan="5">12.710 V</td><td>Date:</td><td colspan="5">17/05/2021 8.59.49</td></tr><tr><td>Current:</td><td colspan="5">4,000 A</td><td>File:</td><td colspan="5">LARES 755-QL21 SC.04 (IEN 7121) max cd 2021 at 4.00 A</td></tr><tr><td>Comment:</td><td colspan="11">constant current 4.00 A measured with: Keysight U1253B sn MY61060043</td></tr></table> <div>max I scan 25-25 15-15</div> <table><tr><th>Function</th><th>Mean</th><th>Max</th><th>I</th><th>H</th><th>V</th><th>Reaim</th><th>H</th><th>V</th><th>N.O.K.</th></tr><tr><td>25L to 25R - 15D to 15U</td><td>0</td><td>0</td><td>(59,7) 76,1</td><td>(- 25,00°) 0,00°</td><td>(- 15,00°) -1,00°</td><td></td><td></td><td></td><td></td></tr></table>										Program:		max I scan 25-25 15-15								max I scan												Name:	LARES 755-QL21 SC.04 (IEN 7121) max cd 2021 at 4.00 A											Number:	constant A 4.00 A											Report:												Test no.:												Lamp type:												Lamp no:	SC.04											Lamp flux:	0 lm					Operator:	Qualilab					Voltage:	12.710 V					Date:	17/05/2021 8.59.49					Current:	4,000 A					File:	LARES 755-QL21 SC.04 (IEN 7121) max cd 2021 at 4.00 A					Comment:	constant current 4.00 A measured with: Keysight U1253B sn MY61060043											Function	Mean	Max	I	H	V	Reaim	H	V	N.O.K.	25L to 25R - 15D to 15U	0	0	(59,7) 76,1	(- 25,00°) 0,00°	(- 15,00°) -1,00°				
Program:		max I scan 25-25 15-15																																																																																																																																																																											
max I scan																																																																																																																																																																													
Name:	LARES 755-QL21 SC.04 (IEN 7121) max cd 2021 at 4.00 A																																																																																																																																																																												
Number:	constant A 4.00 A																																																																																																																																																																												
Report:																																																																																																																																																																													
Test no.:																																																																																																																																																																													
Lamp type:																																																																																																																																																																													
Lamp no:	SC.04																																																																																																																																																																												
Lamp flux:	0 lm					Operator:	Qualilab																																																																																																																																																																						
Voltage:	12.710 V					Date:	17/05/2021 8.59.49																																																																																																																																																																						
Current:	4,000 A					File:	LARES 755-QL21 SC.04 (IEN 7121) max cd 2021 at 4.00 A																																																																																																																																																																						
Comment:	constant current 4.00 A measured with: Keysight U1253B sn MY61060043																																																																																																																																																																												
Function	Mean	Max	I	H	V	Reaim	H	V	N.O.K.																																																																																																																																																																				
25L to 25R - 15D to 15U	0	0	(59,7) 76,1	(- 25,00°) 0,00°	(- 15,00°) -1,00°																																																																																																																																																																								

	Test report	755-QL21-R02 ver. 1	
	Applicant	LARES di Claudio Lerici Regione Viazzi, 6 15010 - Castelletto d'Erro (AL) - Italy	
	Type	SC_04 (IEN 7121)	

ANNEX II		CCT measurement with I_A setting	
Standards and applicable points	CIE 15:2018		
Sample identification	755-QL21 SC_04 (IEN 7121)		
Place of testing	Qualilab Srl - Via Trento, 87 - 25020 - Capriano del Colle (BS) - Italy		
Test date	14/05/2021		
Environmental conditions	Temperature 23 °C ± 3 °C		
Instruments	Temperature-humidity datalogger Testo 174H QL-IN-021 Spectrometer BENTHAM IDR3000-PSL QL-IN-009 Multimeter Keysight U1253B sn MY61060043		
Test procedure	The sample was mounted on the goniometer; correlated color temperature was measured in the optical axis at the current I_A declared and measured with the multimeter provided by the applicant. The sample was set into the pivot point of the goniometer and the optical axis was installed perpendicular to the spectrometer head.		
Test requirements	Not applicable		
VERDICT / RESULT	SC_02 (IEN 5587)		
	CCT [K]	Color point x, y	
	2857	0,4494	0,4112
			


	Test report	755-QL21-R02 ver. 1	 LAB N° 1235 L Membro degli Accordi di Mutuo Riconoscimento EA, IAF e ILAC Signatory of EA, IAF and ILAC Mutual Recognition Agreements
	Applicant	LARES di Claudio Lerici Regione Viazzi, 6 15010 - Castelletto d'Erro (AL) - Italy	
	Type	SC_04 (IEN 7121)	



ANNEX III		Maximum light intensity at 10 m with I_A setting																																																																																																																																																																				
Standards and applicable points	CIE 70:1987																																																																																																																																																																					
Sample identification	SC_04 (IEN 7121)																																																																																																																																																																					
Place of testing	Qualilab Srl - Via Trento, 87 - 25020 - Capriano del Colle (BS) - Italy																																																																																																																																																																					
Test date	17/05/2021																																																																																																																																																																					
Environmental conditions	Temperature 23 °C ± 3 °C																																																																																																																																																																					
Instruments	Temperature-humidity datalogger Testo 174H QL-IN-018 Temperature-humidity datalogger Testo 174H QL-IN-020 Photogoniometer LMT GO-H 1200 QL-IN-002																																																																																																																																																																					
Test procedure	The sample was mounted (with the support provided by the manufacturer) on the goniometer and powered with the constant current I_A measured with the multimeter provided by the applicant. The light intensity distribution at 10 m was measured and the maximum light intensity was determined. The sample was set into the pivot point of the goniometer and the optical axis was installed perpendicular to the photometer head																																																																																																																																																																					
Test requirements	Not applicable																																																																																																																																																																					
VERDICT / RESULT		<table><tr><td>Program:</td><td colspan="5"></td><td colspan="5">max I scan 25-25 15-15</td></tr><tr><td colspan="11">max I scan</td></tr><tr><td>Name:</td><td colspan="10">LARES 755-QL21 SC.04 (IEN 7121) max cd 2021 at IIA</td></tr><tr><td>Number:</td><td colspan="10">constant A 4.171A</td></tr><tr><td>Report:</td><td colspan="10"></td></tr><tr><td>Test no.:</td><td colspan="10"></td></tr><tr><td>Lamp type:</td><td colspan="10"></td></tr><tr><td>Lamp no.:</td><td colspan="10">SC 04</td></tr><tr><td>Lamp flux:</td><td colspan="5">0 lm</td><td>Operator:</td><td colspan="5">Qualilab</td></tr><tr><td>Voltage:</td><td colspan="5">13,560 V</td><td>Date:</td><td colspan="5">17/05/2021 9.16.18</td></tr><tr><td>Current:</td><td colspan="5">4,171 A</td><td>File:</td><td colspan="5">LARES 755-QL21 SC.04 (IEN 7121) max cd 2021 at IIA</td></tr><tr><td>Comment:</td><td colspan="10">constant current 4.171 A measured with: Keysight U1253B sn MY61080043</td></tr></table> <div>max I scan 25-25 15-15</div> <table><tr><th>Function</th><th>Mean</th><th>Max</th><th>I</th><th>H</th><th>V</th><th>Reaim</th><th>H</th><th>V</th><th>N.O.K.</th></tr><tr><td>25L to 25R - 15D to 15U</td><td>0</td><td>0</td><td>(76,0) 96,7</td><td>(-) 25,00° -1,00°</td><td>(-) 15,00° 0,00°</td><td></td><td></td><td></td><td></td></tr></table>										Program:						max I scan 25-25 15-15					max I scan											Name:	LARES 755-QL21 SC.04 (IEN 7121) max cd 2021 at IIA										Number:	constant A 4.171A										Report:											Test no.:											Lamp type:											Lamp no.:	SC 04										Lamp flux:	0 lm					Operator:	Qualilab					Voltage:	13,560 V					Date:	17/05/2021 9.16.18					Current:	4,171 A					File:	LARES 755-QL21 SC.04 (IEN 7121) max cd 2021 at IIA					Comment:	constant current 4.171 A measured with: Keysight U1253B sn MY61080043										Function	Mean	Max	I	H	V	Reaim	H	V	N.O.K.	25L to 25R - 15D to 15U	0	0	(76,0) 96,7	(-) 25,00° -1,00°	(-) 15,00° 0,00°				
Program:						max I scan 25-25 15-15																																																																																																																																																																
max I scan																																																																																																																																																																						
Name:	LARES 755-QL21 SC.04 (IEN 7121) max cd 2021 at IIA																																																																																																																																																																					
Number:	constant A 4.171A																																																																																																																																																																					
Report:																																																																																																																																																																						
Test no.:																																																																																																																																																																						
Lamp type:																																																																																																																																																																						
Lamp no.:	SC 04																																																																																																																																																																					
Lamp flux:	0 lm					Operator:	Qualilab																																																																																																																																																															
Voltage:	13,560 V					Date:	17/05/2021 9.16.18																																																																																																																																																															
Current:	4,171 A					File:	LARES 755-QL21 SC.04 (IEN 7121) max cd 2021 at IIA																																																																																																																																																															
Comment:	constant current 4.171 A measured with: Keysight U1253B sn MY61080043																																																																																																																																																																					
Function	Mean	Max	I	H	V	Reaim	H	V	N.O.K.																																																																																																																																																													
25L to 25R - 15D to 15U	0	0	(76,0) 96,7	(-) 25,00° -1,00°	(-) 15,00° 0,00°																																																																																																																																																																	

	Test report	755-QL21-R02 ver. 1	 <small>LAB N° 1235 L</small> <small>Membro degli Accordi di Mutuo Riconoscimento EA, IAF e ILAC</small> <small>Signatory of EA, IAF and ILAC Mutual Recognition Agreements</small>
	Applicant	LARES di Claudio Lerici Regione Viazzi, 6 15010 - Castelletto d'Erro (AL) - Italy	
	Type	SC_04 (IEN 7121)	

ANNEX IV

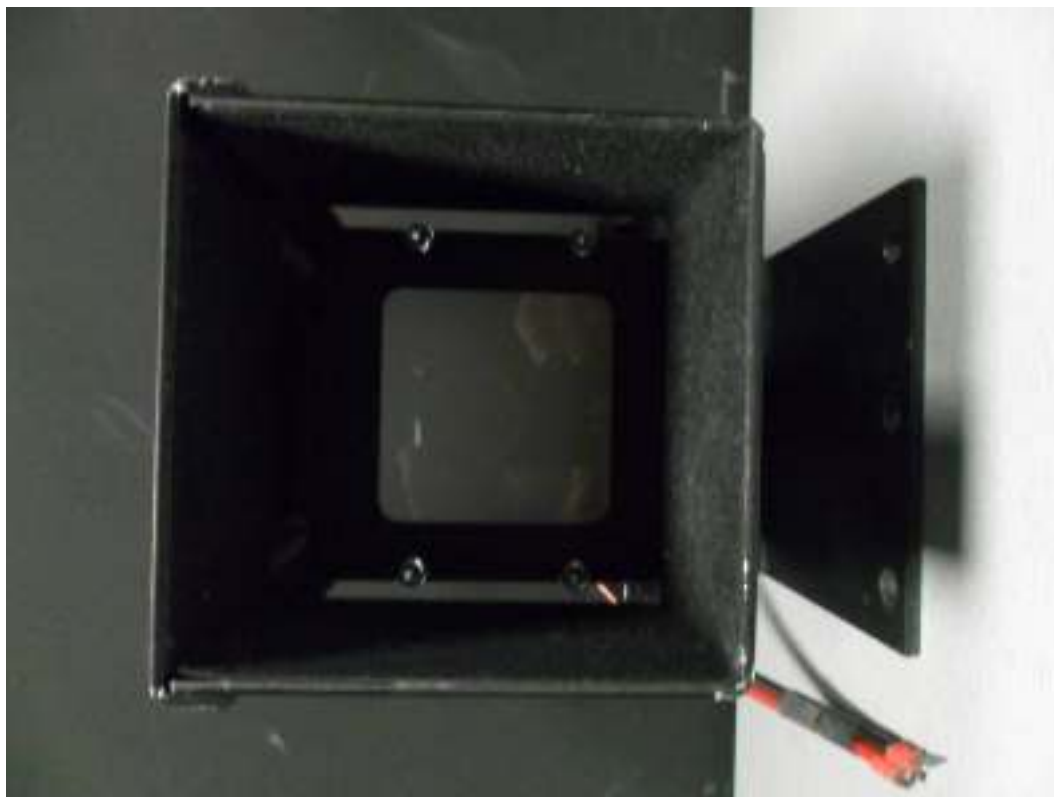Photographs



	Test report	755-QL21-R02 ver. 1	
	Applicant	LARES di Claudio Lerici Regione Viazzi, 6 15010 - Castelletto d'Erro (AL) - Italy	
	Type	SC_04 (IEN 7121)	



	Test report	755-QL21-R02 ver. 1	 <small>LAB N° 1235 L</small> <small>Membro degli Accordi di Mutuo Riconoscimento EA, IAF e ILAC</small> <small>Signatory of EA, IAF and ILAC Mutual Recognition Agreements</small>
	Applicant	LARES di Claudio Lerici Regione Viazzi, 6 15010 - Castelletto d'Erro (AL) - Italy	
	Type	SC_04 (IEN 7121)	

