






	Test report	684-QL22-R02 ver. 0	
	Applicant	LARES di Claudio Lerici Regione Viazzi, 6 15010 - Castelletto d'Erro (AL) - Italy	
	Type	SC_04 (IEN 7121)	

TEST REPORT 684-QL22-R02 ver. 0



Addresses Indirizzi		
Applicant Richiedente	LARES di Claudio Lerici - Regione Viazzi, 6 - 15010 - Castelletto d'Erro (AL) - Italy	
Manufacturer Produttore	Same as applicant/Come il richiedente	
Dates and authorization Date e autorizzazioni		
Report Date Data emissione rapporto di prova	17/05/2022	
Written by Preparato da	Matteo Roncali	
Authorized by Autorizzato da	Ing. Michele Peschiera	
Sample under test (data declared by the applicant and under applicant's responsibility) Dispositivo sottoposto a prova (dati forniti dal richiedente e sotto la sua responsabilità)		
Sample description Descrizione dispositivo	Diffuse light source	
Type Modello	SC_04 (IEN 7121)	
Light source: Sorgente luminosa:	Not declared	
Multimeter: Multimetro :	Keysight U1253B sn MY61060043	
Illuminant A current Corrente per illuminante A	I_A : 4,1003 A	
Applicable Standard Norme applicabili		
	CIE 15:2018 Colorimetry and CIE 70:1987 Measurement of absolute luminous intensity distribution	

The test results and observations indicated in this test report refer exclusively to the samples as received and tested. It is not permitted to transfer the results to other systems or configurations. The publication or duplication of this test report with enclosures, or Part of this test report or enclosures, without a written consent of the test laboratory is not permitted. The test laboratory not assumes any liability to any party for any loss, expense or damage occasioned by the use of this report. Any use of the laboratories name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by the test laboratory. In case of a multilingual test report, the English version is the only official version.



I risultati e le osservazioni indicate in questo rapporto di prova sono riferiti esclusivamente ai campioni così come ricevuti e testati. Non è permesso utilizzare i risultati e le osservazioni di questo rapporto di prova per altri sistemi o configurazioni. Non è permessa la pubblicazione o la duplicazione completa o parziale di questo rapporto di prova e dei suoi allegati senza un consenso scritto da parte del laboratorio di prova. Il laboratorio di prova non si assume responsabilità nei confronti di terzi per danni o eventuali costi derivanti dall'utilizzo dei dati presenti in questo rapporto di prova. Ogni uso del nome del laboratorio di prova e dei suoi marchi per la vendita o per pubblicizzare il prodotto testato deve essere prima approvato in forma scritta dal laboratorio di prova. In caso di rapporti di prova con più lingue, la versione inglese è da considerarsi quella ufficiale.

	Test report	684-QL22-R02 ver. 0	
	Applicant	LARES di Claudio Lerici Regione Viazzi, 6 15010 - Castelletto d'Erro (AL) - Italy	
	Type	SC_04 (IEN 7121)	



Annex Annesso	Test Name Identificazione prova	Test Procedure Procedura di prova	Test Requirement Requisito di prova	Verdict / Result Esito / Risultato
I	Maximum Illuminance at 10 m with 4,000 A setting	The sample was mounted (with the support provided by the manufacturer) on the goniometer and powered with the constant current of 4,000 A measured with the multimeter provided by the applicant. The illuminance distribution at 10 m was measured and the maximum illuminance was determined	Not applicable	$E_{\max} = 75,5 \text{ cd}$ 1,05° H; -1,25° V
II	CCT measurement with I_A setting	The sample was mounted on the goniometer; correlated color temperature was measured in the optical axis at the current I_A declared and measured with the multimeter provided by the applicant	Not applicable	$CCT = 2856 \text{ K}$
III	Maximum Illuminance at 10 m with I_A setting	The sample was mounted (with the support provided by the manufacturer) on the goniometer and powered with the constant current I_A measured with the multimeter provided by the applicant. The illuminance distribution at 10 m was measured and the maximum illuminance was determined	Not applicable	$E_{\max_A} = 87,5 \text{ cd}$ -0,20° H; 0,40° V
IV	Photographs	-	-	-


	Test report	684-QL22-R02 ver. 0	
	Applicant	LARES di Claudio Leric Regione Viazzi, 6 15010 - Castelletto d'Erro (AL) - Italy	
	Type	SC_04 (IEN 7121)	



Uncertainty Incertezza	
Photometric parameter Parametri fotometrici	Luminous intensity and illuminance/ Intensità luminosa e illuminamento = 1,9 %
Color coordinates Coordinate cromatiche	$x = 0,0007$ $y = 0,0009$
Correlated colour temperature Temperatura colore	± 21 K
Sample mounting precision Precisione montaggio dispositivo	$\pm 0,5^\circ$
Statement Dichiarazione	<p>The measured value (y) and the associated expanded uncertainty (U) represent the interval ($y \pm U$) which contains the value of the measured quantity with a probability of approximately 95 % and a coverage factor $k = 2$.</p> <p>The values into the different annex have the maximum significant figures managed by the measurement software.</p> <p>Il valore misurato (y) e l'incertezza estesa associata (U) rappresentano l'intervallo ($y \pm U$) che contiene il valore della grandezza misurata con una probabilità di circa il 95 % e un fattore di copertura $k = 2$.</p> <p>I valori negli annessi sono riportati con il massimo numero di cifre significative gestite dal software della strumentazione.</p>

	Test report	684-QL22-R02 ver. 0	
	Applicant	LARES di Claudio Lerici Regione Viazzi, 6 15010 - Castelletto d'Erro (AL) - Italy	
	Type	SC_04 (IEN 7121)	

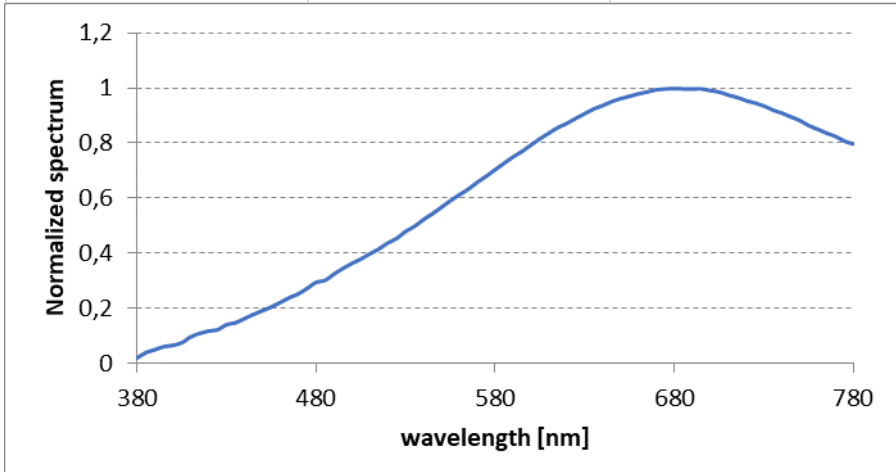

ANNEX I		Maximum Illuminance at 10 m with 4,000 A setting																																																																																																																																																																		
Standards and applicable points	CIE 70:1987																																																																																																																																																																			
Sample identification	SC_04 (IEN 7121)																																																																																																																																																																			
Place of testing	Qualilab Srl - Via Trento, 87 - 25020 - Capriano del Colle (BS) - Italy																																																																																																																																																																			
Test date	13/05/2022																																																																																																																																																																			
Environmental conditions	Temperature 23 °C ± 3 °C																																																																																																																																																																			
Instruments	Temperature-humidity datalogger Testo 174H QL-IN-018 Temperature-humidity datalogger Testo 174H QL-IN-020 Photogoniometer LMT GO-H 1200 QL-IN-002 Multimeter Keysight U1253B sn MY61060043																																																																																																																																																																			
Test procedure	The sample was mounted (with the support provided by the manufacturer) on the goniometer and powered with the constant current of 4,000 A measured with the multimeter provided by the applicant. The illuminance distribution at 25 m was measured and the maximum illuminance was determined. The sample was set into the pivot point of the goniometer and the optical axis was installed perpendicular to the photometer head.																																																																																																																																																																			
Test requirements	Not applicable																																																																																																																																																																			
VERDICT / RESULT		<table><tr><td>Program:</td><td colspan="4"></td><td colspan="2">max E scan</td></tr><tr><td colspan="6">max E scan</td></tr><tr><td>Name:</td><td colspan="11">LARES 684-QL22 SC.04 (IEN 7121) max E 2022 4.0 A</td></tr><tr><td>Number:</td><td colspan="11">constant A 4.00 A</td></tr><tr><td>Report:</td><td colspan="11"></td></tr><tr><td>Test no.:</td><td colspan="11"></td></tr><tr><td>Lamp type:</td><td colspan="11"></td></tr><tr><td>Lamp no:</td><td colspan="11">SC.04</td></tr><tr><td>Lamp flux:</td><td colspan="4">0 lm</td><td>Operator:</td><td colspan="6">Qualilab</td></tr><tr><td>Voltage:</td><td colspan="4">12,710 V</td><td>Date:</td><td colspan="6">13/05/2022 16.43.26</td></tr><tr><td>Current:</td><td colspan="4">4,000 A</td><td>File:</td><td colspan="6">LARES 684-QL22 SC.04 (IEN 7121) max E 2022 4.0 A</td></tr><tr><td>Comment:</td><td colspan="11">constant current 4.00 A measured with: Keysight U1253B sn MY61060043</td></tr></table> <div>max E scan</div> <table><tr><th>Function</th><th>Mean</th><th>Max</th><th>I</th><th>H</th><th>V</th><th>Reaim</th><th>H</th><th>V</th><th>N.O.K.</th></tr><tr><td>15L to 15R - 5D to 5U (0.10)</td><td>0</td><td>0</td><td>75,5</td><td>1,05°</td><td>-1,25°</td><td></td><td></td><td></td><td></td></tr></table>										Program:					max E scan		max E scan						Name:	LARES 684-QL22 SC.04 (IEN 7121) max E 2022 4.0 A											Number:	constant A 4.00 A											Report:												Test no.:												Lamp type:												Lamp no:	SC.04											Lamp flux:	0 lm				Operator:	Qualilab						Voltage:	12,710 V				Date:	13/05/2022 16.43.26						Current:	4,000 A				File:	LARES 684-QL22 SC.04 (IEN 7121) max E 2022 4.0 A						Comment:	constant current 4.00 A measured with: Keysight U1253B sn MY61060043											Function	Mean	Max	I	H	V	Reaim	H	V	N.O.K.	15L to 15R - 5D to 5U (0.10)	0	0	75,5	1,05°	-1,25°				
Program:					max E scan																																																																																																																																																															
max E scan																																																																																																																																																																				
Name:	LARES 684-QL22 SC.04 (IEN 7121) max E 2022 4.0 A																																																																																																																																																																			
Number:	constant A 4.00 A																																																																																																																																																																			
Report:																																																																																																																																																																				
Test no.:																																																																																																																																																																				
Lamp type:																																																																																																																																																																				
Lamp no:	SC.04																																																																																																																																																																			
Lamp flux:	0 lm				Operator:	Qualilab																																																																																																																																																														
Voltage:	12,710 V				Date:	13/05/2022 16.43.26																																																																																																																																																														
Current:	4,000 A				File:	LARES 684-QL22 SC.04 (IEN 7121) max E 2022 4.0 A																																																																																																																																																														
Comment:	constant current 4.00 A measured with: Keysight U1253B sn MY61060043																																																																																																																																																																			
Function	Mean	Max	I	H	V	Reaim	H	V	N.O.K.																																																																																																																																																											
15L to 15R - 5D to 5U (0.10)	0	0	75,5	1,05°	-1,25°																																																																																																																																																															

	Test report	684-QL22-R02 ver. 0	 <small>LAB N° 1235 L</small> <small>Membro degli Accordi di Mutuo Riconoscimento EA, IAF e ILAC</small> <small>Signatory of EA, IAF and ILAC Mutual Recognition Agreements</small>
	Applicant	LARES di Claudio Lerici Regione Viazzi, 6 15010 - Castelletto d'Erro (AL) - Italy	
	Type	SC_04 (IEN 7121)	

ANNEX II		CCT measurement with I_A setting	
Standards and applicable points	CIE 15:2018		
Sample identification	SC_04 (IEN 7121)		
Place of testing	Qualilab Srl - Via Trento, 87 - 25020 - Capriano del Colle (BS) - Italy		
Test date	13/05/2022		
Environmental conditions	Temperature 23 °C ± 3 °C		
Instruments	Temperature-humidity datalogger Testo 174H QL-IN-021 Spectrometer BENTHAM IDR3000-PSL QL-IN-009 Multimeter Keysight U1253B sn MY61060043		
Test procedure	The sample was mounted on the goniometer; correlated color temperature was measured in the optical axis at the current I_A declared and measured with the multimeter provided by the applicant. The sample was set into the pivot point of the goniometer and the optical axis was installed perpendicular to the spectrometer head.		
Test requirements	Not applicable		
VERDICT / RESULT	SC_02 (IEN 5587)		
	CCT [K]	Color point x, y	
	2856	0,4494	0,4111
			


	Test report	684-QL22-R02 ver. 0	
	Applicant	LARES di Claudio Lerici Regione Viazzi, 6 15010 - Castelletto d'Erro (AL) - Italy	
	Type	SC_04 (IEN 7121)	



ANNEX III		Maximum Illuminance at 10 m with I_A setting																																																																																																																																	
Standards and applicable points		CIE 70:1987																																																																																																																																	
Sample identification		684-QL22 SC_04 (IEN 7121)																																																																																																																																	
Place of testing		Qualilab Srl - Via Trento, 87 - 25020 - Capriano del Colle (BS) - Italy																																																																																																																																	
Test date		13/05/2022																																																																																																																																	
Environmental conditions		Temperature 23 °C ± 3 °C																																																																																																																																	
Instruments		Temperature-humidity datalogger Testo 174H QL-IN-018 Temperature-humidity datalogger Testo 174H QL-IN-020 Photogoniometer LMT GO-H 1200 QL-IN-002 Multimeter Keysight U1253B sn MY61060043																																																																																																																																	
Test procedure		The sample was mounted (with the support provided by the manufacturer) on the goniometer and powered with the constant current I_A measured with the multimeter provided by the applicant. The illuminance distribution at 25 m was measured and the maximum illuminance was determined. The sample was set into the pivot point of the goniometer and the optical axis was installed perpendicular to the photometer head.																																																																																																																																	
Test requirements		Not applicable																																																																																																																																	
VERDICT / RESULT		<table><tr><td>Program:</td><td colspan="8"></td><td>max E scan</td></tr><tr><td colspan="10">max E scan</td></tr><tr><td>Name:</td><td colspan="9">LARES 684-QL22 SC.04 (IEN 7121) max E 2022 4.1003A</td></tr><tr><td>Number:</td><td colspan="9">constant A 4.1003 A</td></tr><tr><td>Report:</td><td colspan="9"></td></tr><tr><td>Test no.:</td><td colspan="9"></td></tr><tr><td>Lamp type:</td><td colspan="9"></td></tr><tr><td>Lamp no:</td><td colspan="9">SC.04</td></tr><tr><td>Lamp flux:</td><td colspan="4">0 lm</td><td>Operator:</td><td colspan="4">Qualilab</td></tr><tr><td>Voltage:</td><td colspan="4">13.030 V</td><td>Date:</td><td colspan="4">16/05/2022 9.25.40</td></tr><tr><td>Current:</td><td colspan="4">4,100 A</td><td>File:</td><td colspan="4">LARES 684-QL22 SC.04 (IEN 7121) max E 2022 4.1003A</td></tr><tr><td>Comment:</td><td colspan="9">constant current 4.1003 A measured with: Keysight U1253B sn MY61060043</td></tr></table>										Program:									max E scan	max E scan										Name:	LARES 684-QL22 SC.04 (IEN 7121) max E 2022 4.1003A									Number:	constant A 4.1003 A									Report:										Test no.:										Lamp type:										Lamp no:	SC.04									Lamp flux:	0 lm				Operator:	Qualilab				Voltage:	13.030 V				Date:	16/05/2022 9.25.40				Current:	4,100 A				File:	LARES 684-QL22 SC.04 (IEN 7121) max E 2022 4.1003A				Comment:	constant current 4.1003 A measured with: Keysight U1253B sn MY61060043								
		Program:									max E scan																																																																																																																								
		max E scan																																																																																																																																	
		Name:	LARES 684-QL22 SC.04 (IEN 7121) max E 2022 4.1003A																																																																																																																																
		Number:	constant A 4.1003 A																																																																																																																																
		Report:																																																																																																																																	
		Test no.:																																																																																																																																	
		Lamp type:																																																																																																																																	
		Lamp no:	SC.04																																																																																																																																
		Lamp flux:	0 lm				Operator:	Qualilab																																																																																																																											
Voltage:	13.030 V				Date:	16/05/2022 9.25.40																																																																																																																													
Current:	4,100 A				File:	LARES 684-QL22 SC.04 (IEN 7121) max E 2022 4.1003A																																																																																																																													
Comment:	constant current 4.1003 A measured with: Keysight U1253B sn MY61060043																																																																																																																																		
max E scan																																																																																																																																			
<table><tr><th>Function</th><th>Mean</th><th>Max</th><th>I</th><th>H</th><th>V</th><th>Reaim</th><th>H</th><th>V</th><th>N.O.K.</th></tr><tr><td>15L to 15R - 5D to 5U (0.10)</td><td>0</td><td>0</td><td>87,5</td><td>-0,20°</td><td>0,40°</td><td></td><td></td><td></td><td></td></tr></table>										Function	Mean	Max	I	H	V	Reaim	H	V	N.O.K.	15L to 15R - 5D to 5U (0.10)	0	0	87,5	-0,20°	0,40°																																																																																																										
Function	Mean	Max	I	H	V	Reaim	H	V	N.O.K.																																																																																																																										
15L to 15R - 5D to 5U (0.10)	0	0	87,5	-0,20°	0,40°																																																																																																																														

	Test report	684-QL22-R02 ver. 0	 LAB N° 1235 L Membro degli Accordi di Mutuo Riconoscimento EA, IAF e ILAC Signatory of EA, IAF and ILAC Mutual Recognition Agreements
	Applicant	LARES di Claudio Lerici Regione Viazzi, 6 15010 - Castelletto d'Erro (AL) - Italy	
	Type	SC_04 (IEN 7121)	

ANNEX IV

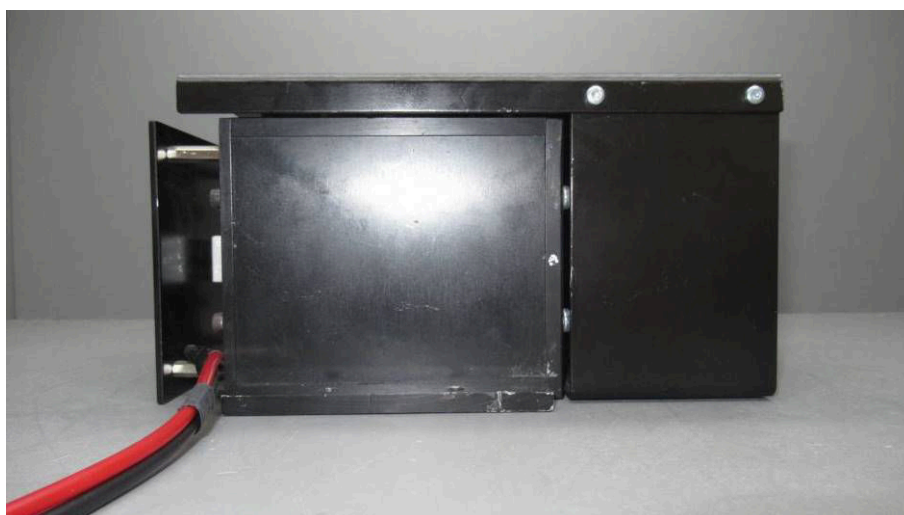Photographs



	Test report	684-QL22-R02 ver. 0	 LAB N° 1235 L Membro degli Accordi di Mutuo Riconoscimento EA, IAF e ILAC Signatory of EA, IAF and ILAC Mutual Recognition Agreements
	Applicant	LARES di Claudio Lerici Regione Viazzi, 6 15010 - Castelletto d'Erro (AL) - Italy	
	Type	SC_04 (IEN 7121)	

