



	Test report	448-QL23-R02 ver. 0	 <small>LAB N° 1235 L</small> <small>Membro degli Accordi di Mutuo Riconoscimento EA, IAF e ILAC</small> <small>Signatory of EA, IAF and ILAC Mutual Recognition Agreements</small>
	Applicant	LARES di Claudio Lerici Regione Viazzi, 6 15010 - Castelletto d'Erro (AL) - Italy	
	Type	SC_04 (IEN 7121)	

TEST REPORT 448-QL23-R02 ver. 0

Dates and authorization Date e autorizzazioni		
Report Date Data emissione rapporto di prova	11/05/2023	
Written by Preparato da	Matteo Roncali	
Authorized by Autorizzato da	Ing. Michele Peschiera	
Data declared under the sole responsibility of the applicant Dati dichiarati dal richiedente e sotto la sua responsabilità		
Applicant Richiedente	LARES di Claudio Lerici - Regione Viazzi, 6 - 15010 - Castelletto d'Erro (AL) - Italy	
Manufacturer Produttore	Same as applicant/Come il richiedente	
Sample description Descrizione campione	Diffuse light source	
Type Modello	SC_04 (IEN 7121)	
Light source Sorgente luminosa	Not declared	
Multimeter Multimetro	Keysight U1253B sn MY61060043	
Illuminant A current Corrente per illuminante A	I_A : 4,083 A	
Applicable Standard Norme applicabili		
	CIE 15:2018 Colorimetry and CIE 70:1987 Measurement of absolute luminous intensity distribution	

The test results and observations indicated in this test report refer exclusively to the samples as received and tested. It is not permitted to transfer the results to other systems or configurations. The partial publication or duplication of this test report without a written consent of the test laboratory is not permitted. The test laboratory not assumes any liability to any party for any loss, expense or damage occasioned by the use of this report. Any use of the laboratories name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by the test laboratory. In case of a multilingual test report, the English version is the only official version.



I risultati e le osservazioni indicate in questo rapporto di prova sono riferiti esclusivamente ai campioni così come ricevuti e testati. Non è permesso utilizzare i risultati e le osservazioni di questo rapporto di prova per altri sistemi o configurazioni. Non è permessa la pubblicazione o la duplicazione parziale di questo rapporto di prova senza un consenso scritto da parte del laboratorio di prova. Il laboratorio di prova non si assume responsabilità nei confronti di terzi per danni o eventuali costi derivanti dall'utilizzo dei dati presenti in questo rapporto di prova. Ogni uso del nome del laboratorio di prova e dei suoi marchi per la vendita o per pubblicizzare il prodotto testato deve essere prima approvato in forma scritta dal laboratorio di prova. In caso di rapporto di prova con più lingue, la versione inglese è da considerarsi quella ufficiale.

	Test report	448-QL23-R02 ver. 0	
	Applicant	LARES di Claudio Lerici Regione Viazzi, 6 15010 - Castelletto d'Erro (AL) - Italy	
	Type	SC_04 (IEN 7121)	



LAB N° 1235 L
Membro degli Accordi di Mutuo Riconoscimento
EA, IAF e ILAC
Signatory of EA, IAF and ILAC
Mutual Recognition Agreements


Annex Annesso	Test Name Identificazione prova	Test Method Metodo di prova	Test Requirement Requisito di prova	Verdict / Result Esito / Risultato
I	Maximum light intensity at 10 m with 4,000 A setting	The sample was mounted (with the support provided by the applicant) on the goniometer and powered with the constant current of 4,000 A measured with the multimeter provided by the applicant. The light intensity distribution at 10 m was measured and the maximum light intensity was determined	Not applicable	$I_{\max}[\text{cd}] = 75,7 \text{ cd}$ -1,55° H; 1,40° V
II	CCT measurement with I_A setting	The sample was mounted on the goniometer; correlated color temperature was measured in the optical axis at the current I_A declared and measured with the multimeter provided by the applicant	Not applicable	$CCT = 2857 \text{ K}$
III	Maximum light intensity at 10 m with I_A setting	The sample was mounted (with the support provided by the applicant) on the goniometer and powered with the constant current I_A measured with the multimeter provided by the applicant. The light intensity distribution at 10 m was measured and the maximum light intensity was determined	Not applicable	$I_{\max_A}[\text{cd}] = 85,0 \text{ cd}$ -1,05° H; 0,50° V
IV	Photographs	-	-	-



Uncertainty Incertezza	
Photometric parameter Parametri fotometrici	Luminous intensity and illuminance / Intensità luminosa e illuminamento = 1,9 %
Color coordinates Coordinate cromatiche	$x = 0,0007$ $y = 0,0009$
Sample mounting precision Precisione montaggio dispositivo	$\pm 0,5^\circ$
Statement Dichiarazione	<p>The measured value (y) and the associated expanded uncertainty (U) represent the interval ($y \pm U$) which contains the value of the measured quantity with a probability of approximately 95 % and a coverage factor $k = 2$.</p> <p>The values into the different annex have the maximum significant figures managed by the measurement software.</p> <p>Il valore misurato (y) e l'incertezza estesa associata (U) rappresentano l'intervallo ($y \pm U$) che contiene il valore della grandezza misurata con una probabilità di circa il 95 % e un fattore di copertura $k = 2$.</p> <p>I valori negli annessi sono riportati con il massimo numero di cifre significative gestite dal software della strumentazione.</p>

	Test report	448-QL23-R02 ver. 0	
	Applicant	LARES di Claudio Lerici Regione Viazzi, 6 15010 - Castelletto d'Erro (AL) - Italy	
	Type	SC_04 (IEN 7121)	

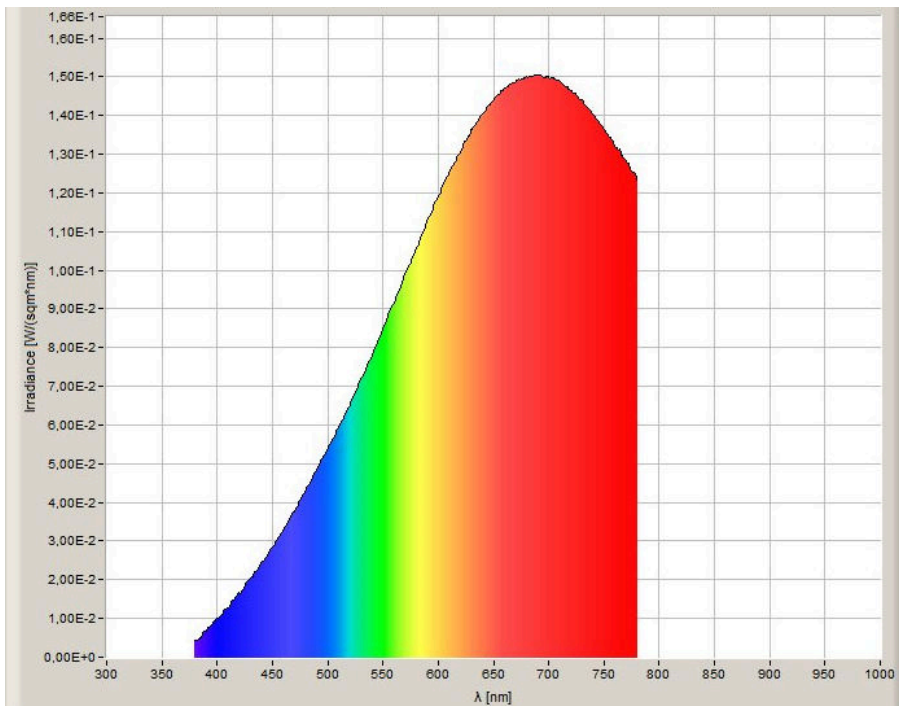

ANNEX I		Maximum light intensity at 10 m with 4,000 A setting																																																																																																																																							
Test method	CIE 70:1987																																																																																																																																								
Sample identification	448-QL23-S02 SC_04 (IEN 7121)																																																																																																																																								
Place of testing	Qualilab Srl - Via Trento, 87 - 25020 - Capriano del Colle (BS) - Italy																																																																																																																																								
Test date	10/05/2023																																																																																																																																								
Environmental conditions	Temperature 23 °C ± 3 °C																																																																																																																																								
Instruments	Temperature-humidity datalogger QL-IN-018 Temperature-humidity datalogger QL-IN-020 Photogoniometer QL-IN-002 Multimeter Keysight U1253B sn MY61060043 (Applicant’s instrument)																																																																																																																																								
Test description	The sample was mounted (with the support provided by the applicant) on the goniometer and powered with the constant current of 4,000 A measured with the multimeter provided by the applicant. The light intensity distribution at 10 m was measured and the maximum light intensity was determined.																																																																																																																																								
Test requirements	Not applicable																																																																																																																																								
VERDICT / RESULT	<table><tr><td>Program:</td><td colspan="4"></td><td colspan="4">max E scan</td></tr><tr><td colspan="9">max E scan</td></tr><tr><td>Name:</td><td colspan="8">LARES 448-QL22 SC.04 (IEN 7121) max E 2023 4.0047 A</td></tr><tr><td>Number:</td><td colspan="8"></td></tr><tr><td>Report:</td><td colspan="8"></td></tr><tr><td>Test no.:</td><td colspan="8"></td></tr><tr><td>Lamp type:</td><td colspan="8"></td></tr><tr><td>Lamp no:</td><td colspan="8">SC.02</td></tr><tr><td>Lamp flux:</td><td colspan="4">0 lm</td><td>Operator:</td><td colspan="3">Qualilab</td></tr><tr><td>Voltage:</td><td colspan="4">12,530 V</td><td>Date:</td><td colspan="3">10/05/2023 16.18.10</td></tr><tr><td>Current:</td><td colspan="4">4,005 A</td><td>File:</td><td colspan="3">LARES 448-QL22 SC.04 (IEN 7121) max E 2023 4.0047 A</td></tr><tr><td>Comment:</td><td colspan="8">Keysight U1253B sn MY61060043</td></tr></table> <div>max E scan</div> <table><tr><th>Function</th><th>Mean</th><th>Max</th><th>I</th><th>H</th><th>V</th><th>Reaim</th><th>H</th><th>V</th><th>N.O.K.</th></tr><tr><td>2L to 2R - 2D to 2U (0.10)</td><td>0</td><td>0</td><td>75,7</td><td>-1,55°</td><td>1,40°</td><td></td><td></td><td></td><td></td></tr></table>									Program:					max E scan				max E scan									Name:	LARES 448-QL22 SC.04 (IEN 7121) max E 2023 4.0047 A								Number:									Report:									Test no.:									Lamp type:									Lamp no:	SC.02								Lamp flux:	0 lm				Operator:	Qualilab			Voltage:	12,530 V				Date:	10/05/2023 16.18.10			Current:	4,005 A				File:	LARES 448-QL22 SC.04 (IEN 7121) max E 2023 4.0047 A			Comment:	Keysight U1253B sn MY61060043								Function	Mean	Max	I	H	V	Reaim	H	V	N.O.K.	2L to 2R - 2D to 2U (0.10)	0	0	75,7	-1,55°	1,40°				
Program:					max E scan																																																																																																																																				
max E scan																																																																																																																																									
Name:	LARES 448-QL22 SC.04 (IEN 7121) max E 2023 4.0047 A																																																																																																																																								
Number:																																																																																																																																									
Report:																																																																																																																																									
Test no.:																																																																																																																																									
Lamp type:																																																																																																																																									
Lamp no:	SC.02																																																																																																																																								
Lamp flux:	0 lm				Operator:	Qualilab																																																																																																																																			
Voltage:	12,530 V				Date:	10/05/2023 16.18.10																																																																																																																																			
Current:	4,005 A				File:	LARES 448-QL22 SC.04 (IEN 7121) max E 2023 4.0047 A																																																																																																																																			
Comment:	Keysight U1253B sn MY61060043																																																																																																																																								
Function	Mean	Max	I	H	V	Reaim	H	V	N.O.K.																																																																																																																																
2L to 2R - 2D to 2U (0.10)	0	0	75,7	-1,55°	1,40°																																																																																																																																				

	Test report	448-QL23-R02 ver. 0	
	Applicant	LARES di Claudio Lerici Regione Viazzi, 6 15010 - Castelletto d'Erro (AL) - Italy	
	Type	SC_04 (IEN 7121)	

ANNEX II		CCT measurement with I_A setting												
Test method	CIE 15:2018													
Sample identification	448-QL23-S02 SC_04 (IEN 7121)													
Place of testing	Qualilab Srl - Via Trento, 87 - 25020 - Capriano del Colle (BS) - Italy													
Test date	10/05/2023													
Environmental conditions	Temperature 23 °C ± 3 °C													
Instruments	Temperature-humidity datalogger QL-IN-021 Spectrometer QL-IN-009 Multimeter Keysight U1253B sn MY61060043 (Applicant’s instrument)													
Test description	The sample was mounted on the goniometer; correlated color temperature was measured in the optical axis at the current I_A declared and measured with the multimeter provided by the applicant. The sample was set into the pivot point of the goniometer and the optical axis was installed perpendicular to the spectrometer head.													
Test requirements	Not applicable													
VERDICT / RESULT	<table><tr><th colspan="3">SC_04 (IEN 7121)</th></tr><tr><th rowspan="2">CCT [K]</th><th colspan="2">Chromaticity coordinates</th></tr><tr><th>x</th><th>y</th></tr><tr><td>2857</td><td>0,4495</td><td>0,4111</td></tr></table> 			SC_04 (IEN 7121)			CCT [K]	Chromaticity coordinates		x	y	2857	0,4495	0,4111
SC_04 (IEN 7121)														
CCT [K]	Chromaticity coordinates													
	x	y												
2857	0,4495	0,4111												


	Test report	448-QL23-R02 ver. 0	
	Applicant	LARES di Claudio Lerici Regione Viazzi, 6 15010 - Castelletto d'Erro (AL) - Italy	
	Type	SC_04 (IEN 7121)	



ANNEX III		Maximum light intensity at 10 m with I_A setting																																																																																																																																																	
Test method	CIE 70:1987																																																																																																																																																		
Sample identification	448-QL23-S02 SC_04 (IEN 7121)																																																																																																																																																		
Place of testing	Qualilab Srl - Via Trento, 87 - 25020 - Capriano del Colle (BS) - Italy																																																																																																																																																		
Test date	10/05/2023																																																																																																																																																		
Environmental conditions	Temperature 23 °C ± 3 °C																																																																																																																																																		
Instruments	Temperature-humidity datalogger QL-IN-018 Temperature-humidity datalogger QL-IN-020 Photogoniometer QL-IN-002 Multimeter Keysight U1253B sn MY61060043 (Applicant’s instrument)																																																																																																																																																		
Test description	The sample was mounted (with the support provided by the applicant) on the goniometer and powered with the constant current I_A measured with the multimeter provided by the applicant. The light intensity distribution at 10 m was measured and the maximum light intensity was determined																																																																																																																																																		
Test requirements	Not applicable																																																																																																																																																		
VERDICT / RESULT	<table><tr><td>Program:</td><td colspan="4"></td><td colspan="4">max E scan</td></tr><tr><td colspan="9">max E scan</td></tr><tr><td>Name:</td><td colspan="8">LARES 448-QL22 SC.04 (IEN 7121) max E 2023 4.0828 A</td></tr><tr><td>Number:</td><td colspan="8"></td></tr><tr><td>Report:</td><td colspan="8"></td></tr><tr><td>Test no.:</td><td colspan="8"></td></tr><tr><td>Lamp type:</td><td colspan="8"></td></tr><tr><td>Lamp no:</td><td colspan="8">SC.02</td></tr><tr><td>Lamp flux:</td><td colspan="4">0 lm</td><td>Operator:</td><td colspan="3">Qualilab</td></tr><tr><td>Voltage:</td><td colspan="4">12.997 V</td><td>Date:</td><td colspan="3">10/05/2023 8.40.57</td></tr><tr><td>Current:</td><td colspan="4">4,083 A</td><td>File:</td><td colspan="3">LARES 448-QL22 SC.04 (IEN 7121) max E 2023 4.0828 A</td></tr><tr><td>Comment:</td><td colspan="8">Keysight U1253B sn MY61060043</td></tr></table> <table><tr><th colspan="10">max E scan</th></tr><tr><th>Function</th><th>Mean</th><th>Max</th><th>I</th><th>H</th><th>V</th><th>Reaim</th><th>H</th><th>V</th><th>N.O.K.</th></tr><tr><td>2L to 2R - 2D to 2U (0.10)</td><td>0</td><td>0</td><td>85,0</td><td>-1,05°</td><td>-0,50°</td><td></td><td></td><td></td><td></td></tr></table>									Program:					max E scan				max E scan									Name:	LARES 448-QL22 SC.04 (IEN 7121) max E 2023 4.0828 A								Number:									Report:									Test no.:									Lamp type:									Lamp no:	SC.02								Lamp flux:	0 lm				Operator:	Qualilab			Voltage:	12.997 V				Date:	10/05/2023 8.40.57			Current:	4,083 A				File:	LARES 448-QL22 SC.04 (IEN 7121) max E 2023 4.0828 A			Comment:	Keysight U1253B sn MY61060043								max E scan										Function	Mean	Max	I	H	V	Reaim	H	V	N.O.K.	2L to 2R - 2D to 2U (0.10)	0	0	85,0	-1,05°	-0,50°				
Program:					max E scan																																																																																																																																														
max E scan																																																																																																																																																			
Name:	LARES 448-QL22 SC.04 (IEN 7121) max E 2023 4.0828 A																																																																																																																																																		
Number:																																																																																																																																																			
Report:																																																																																																																																																			
Test no.:																																																																																																																																																			
Lamp type:																																																																																																																																																			
Lamp no:	SC.02																																																																																																																																																		
Lamp flux:	0 lm				Operator:	Qualilab																																																																																																																																													
Voltage:	12.997 V				Date:	10/05/2023 8.40.57																																																																																																																																													
Current:	4,083 A				File:	LARES 448-QL22 SC.04 (IEN 7121) max E 2023 4.0828 A																																																																																																																																													
Comment:	Keysight U1253B sn MY61060043																																																																																																																																																		
max E scan																																																																																																																																																			
Function	Mean	Max	I	H	V	Reaim	H	V	N.O.K.																																																																																																																																										
2L to 2R - 2D to 2U (0.10)	0	0	85,0	-1,05°	-0,50°																																																																																																																																														

	Test report	448-QL23-R02 ver. 0	 LAB N° 1235 L Membro degli Accordi di Mutuo Riconoscimento EA, IAF e ILAC Signatory of EA, IAF and ILAC Mutual Recognition Agreements
	Applicant	LARES di Claudio Lerici Regione Viazzi, 6 15010 - Castelletto d'Erro (AL) - Italy	
	Type	SC_04 (IEN 7121)	

ANNEX IV

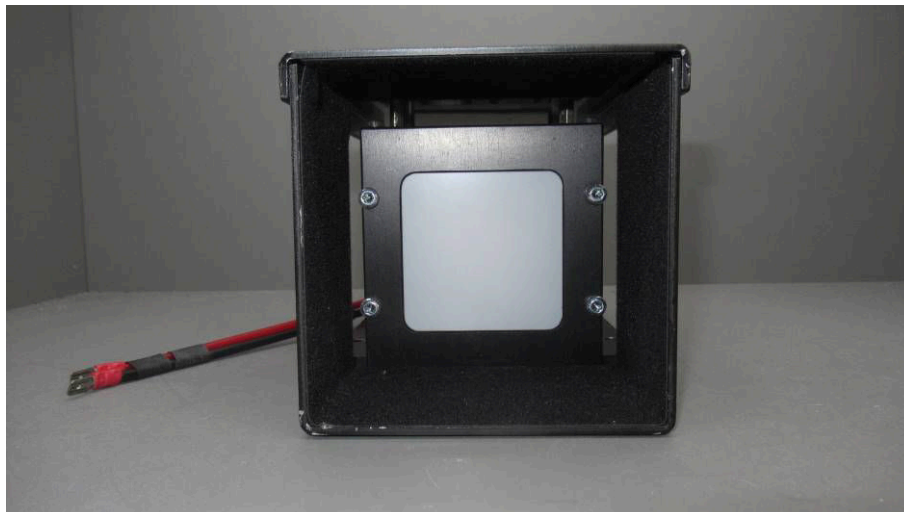Photographs



	Test report	448-QL23-R02 ver. 0	
	Applicant	LARES di Claudio Lericci Regione Viazzi, 6 15010 - Castelletto d'Erro (AL) - Italy	
	Type	SC_04 (IEN 7121)	

LAB N° 1235 L

Membro degli Accordi di Mutuo Riconoscimento
EA, IAF e ILAC
Signatory of EA, IAF and ILAC
Mutual Recognition Agreements

